

SE-4500 Single Output Power Series Parameters


Electrical Specifications

Model			SE-4500-15	SE-4500-24	SE-4500-27	SE-4500-30
OUTPUT	DC voltage		15V	24V	27V	30V
	Current Rating		300A	180A	166A	150A
	Current Range		0 ~300A	0 ~180A	0 ~166A	0 ~150A
	rated power		4500W	4320W	4500W	4500W
	Ripple and Noise		400mVp-p	400mVp-p	400mVp-p	400mVp-p
	Voltage adjustment range		ADJ-10%~+3%	ADJ-10%~+3%	ADJ-10%~+3%	ADJ-10%~+3%
	Voltage Accuracy		± 1.0%	± 1.0%	± 1.0%	± 1.0%
	Line Regulation		± 0.5%	± 0.5%	± 0.5%	± 0.5%
	Load Regulation		± 0.5%	± 0.5%	± 0.5%	± 0.5%
	Start, the rise time	1000ms, 80ms（Full）				
	Hold Time (Typ.)	10ms（Full）				
INPUT	Voltage Range	Single- phase 110V, 220V AC; or three- phase 200V, 380V, 440V AC (terminals L1/L2/L3). Note: Each unit can only be manufactured/configured with one selected voltage specification.或 280 ~ 380VDC				
	Frequency Range	47 ~ 63Hz				
	Power Factor (Typ.)	0.75/230V（Full）				
	Efficiency (Typ.)		88%	88%	88%	88%
	Alternating current (Typ.)	36A/230VAC 9A/380VAC				
	Inrush current (Typ.)	Soft Start 108A/230VAC				
	Leakage current	<3.5mA / 240VAC				
protection	Overload	Rated output 100 ~ 105%				
		Users can continuously adjustable constant current output signal via analog voltage or over-current protection current constant voltage linearly decreased to zero				
	Overvoltage	Close Protection Type Output Output voltage after the restart recovery				
	Over temperature	80℃±5℃ Detection on power transistor radiators			105℃±5℃ Detection on power transistor radiators	
		Output voltage temperature shutdown protection type automatic recovery after fall				
Features	Remote Switch					
	Auxiliary power	13.8V 0.5A The controller can be used for power supply				
	Output voltage control	Output voltage: can be continuously adjusted from 0% to 100% of the rated maximum output current via a 0-5V analog signal, MCU, PLC, PWM, or adjustable resistor.				
	Output current control	Output current: can be continuously adjusted from 0% to 105% of the rated maximum output current via a 1-5V analog signal, MCU, PLC, PWM, or adjustable resistor.				
	Parallel Current					
surrounding	Operating temperature	-20 ~ 70℃				
	Working humidity	20 ~ 90%RH Non-condensing				

undings	Temperature Coefficient	±0.05%/℃（0~50℃）
	Vibration resistance	10 ~ 500Hz, 2G 10 Ten minutes / cycle, X, Y, Z axes of 60 minutes
Safety and EMC	Safety specifications	UL60950-1
	Pressure	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC
	Insulation resistance	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃/ 70% RH
	size	320*220*65(L*W*H)
备注	1. 如未特别说明,所有规格参数均在输入为230VAC, 额定负载, 25℃环境温度下进行量测。 2. 纹波和噪声测量方法: 使用一条12"双绞线, 同时终端要并联0.1uF和47uF的电容, 在20MHz带宽下进行量测。 3. 精度: 包含设定误差, 线性调整率和负载调整率。	


Organization size

机壳型号 1520B 单位 mm

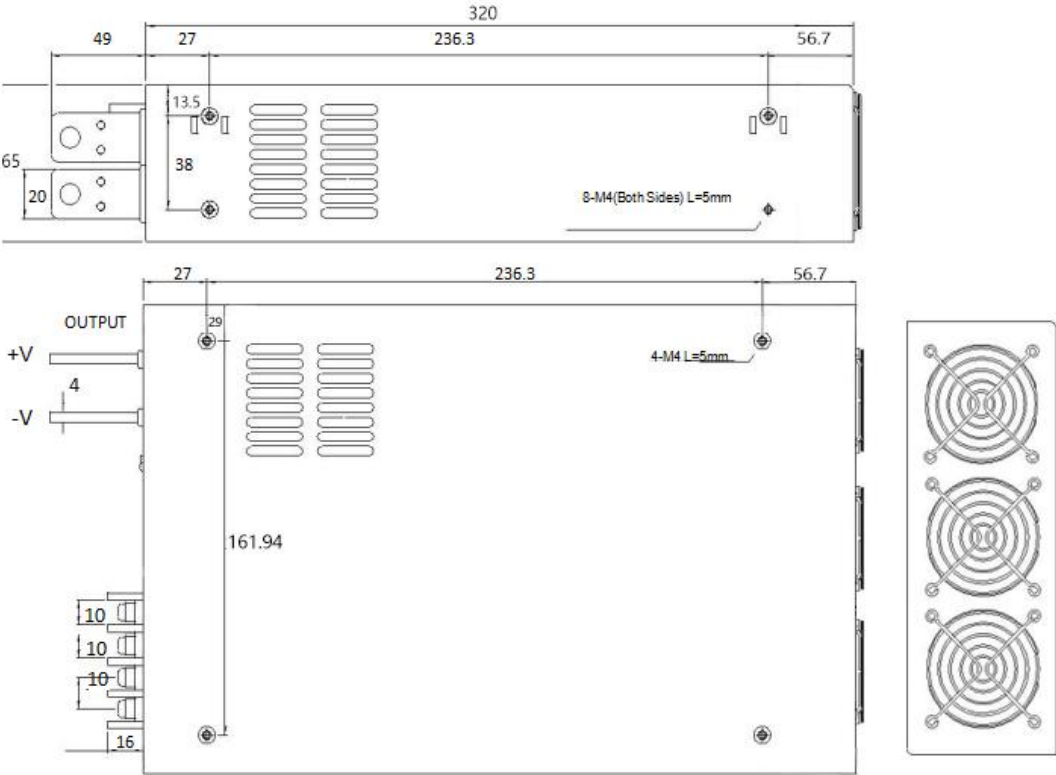


端子引脚分布		端子引脚分布	
引脚编号	引脚功能	引脚编号	引脚功能
1	AC/L1	1	AC/L
2	AC/L2	2	AC/N
3	AC/L3	3	(NC)
4	FG/★	4	FG/★
380/450VAC		110/220VAC	


Factory default fixed voltage output

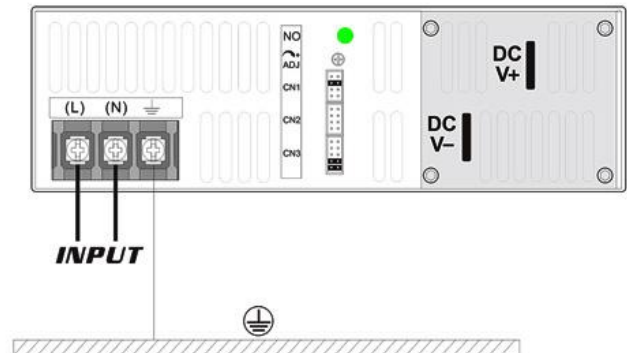


0-5V, 0-10V, PLC, PWM signal control output voltage (0-100%)

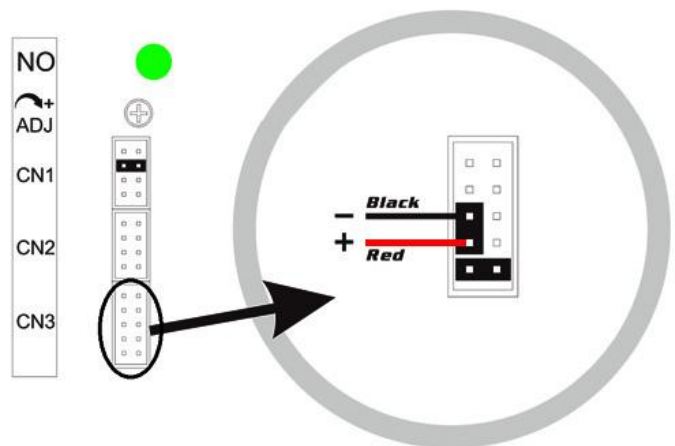


0-5V,0-10V,PLC,PMW signal Controls Output current (0-105%)

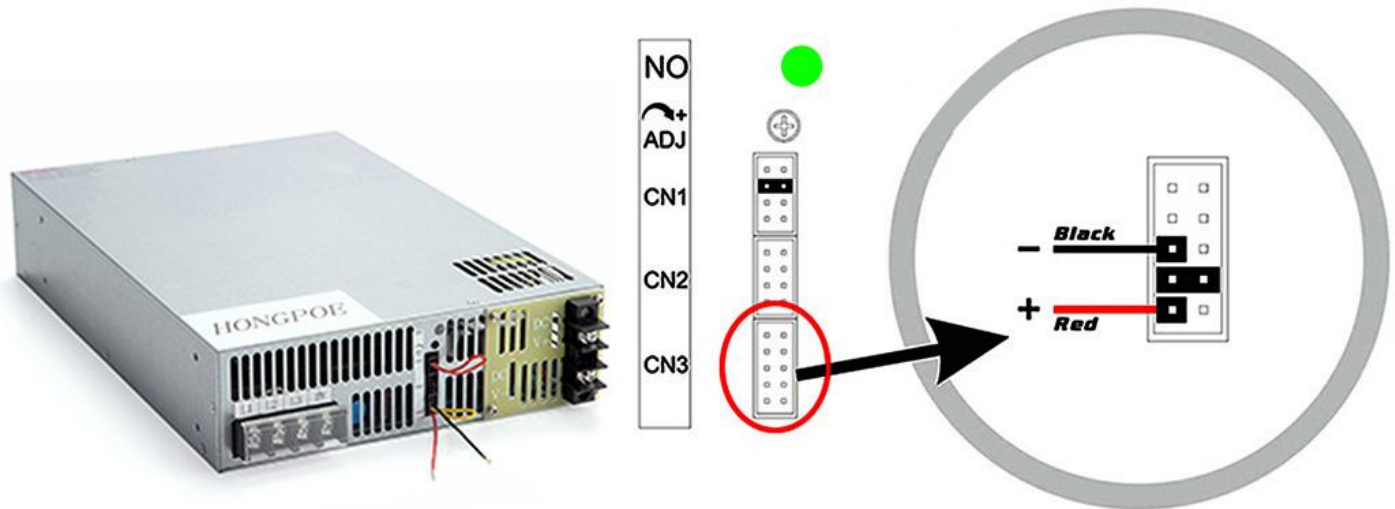


Variable resistor controls output voltage (0-100%)

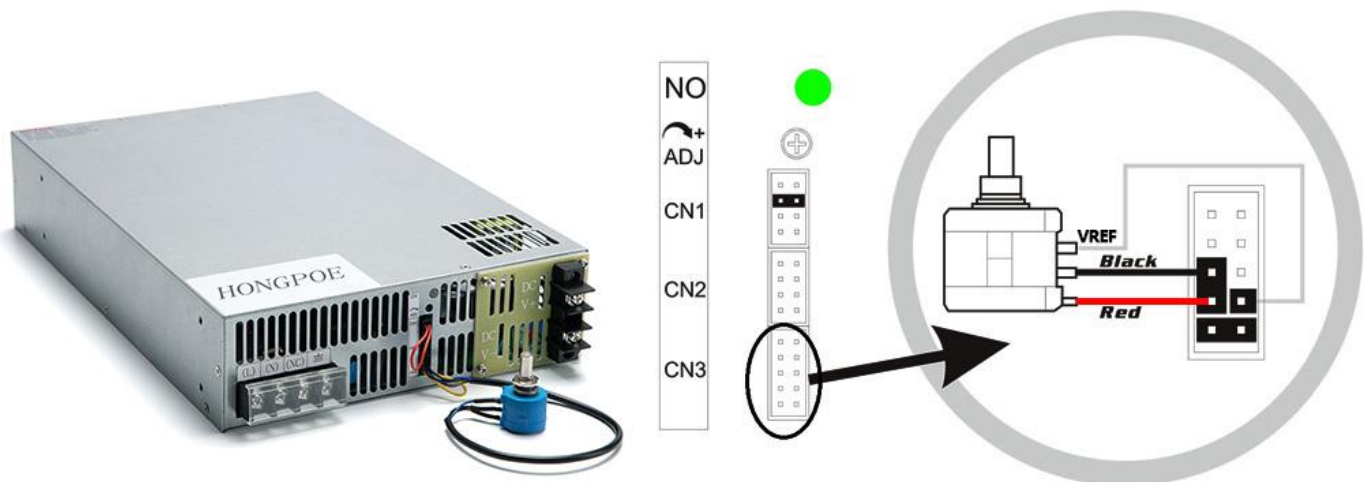

Variable resistor controls output current (0-105%)

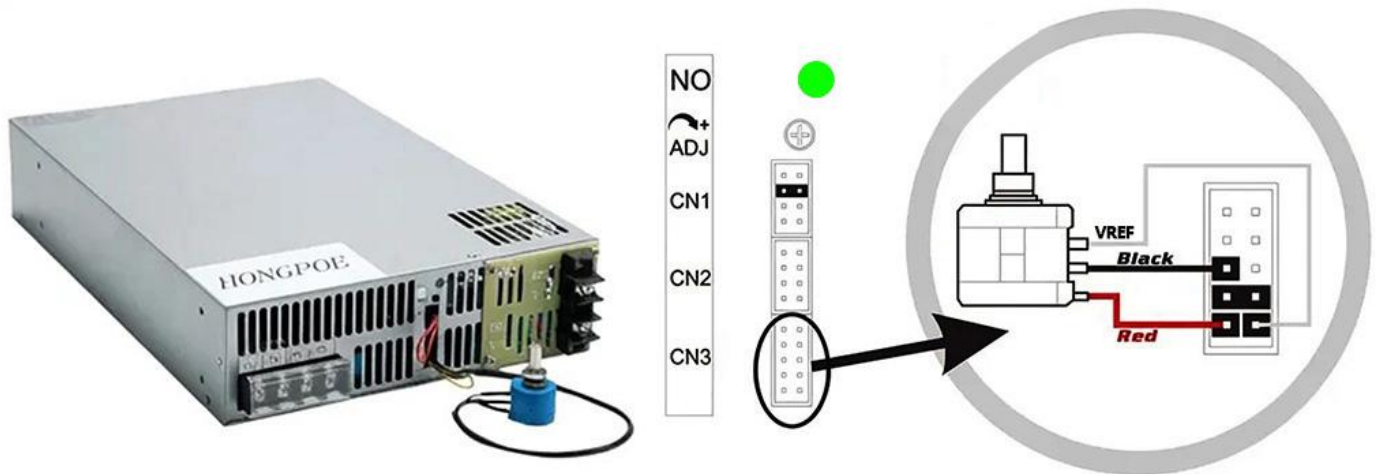


Remote power ON/OFF function

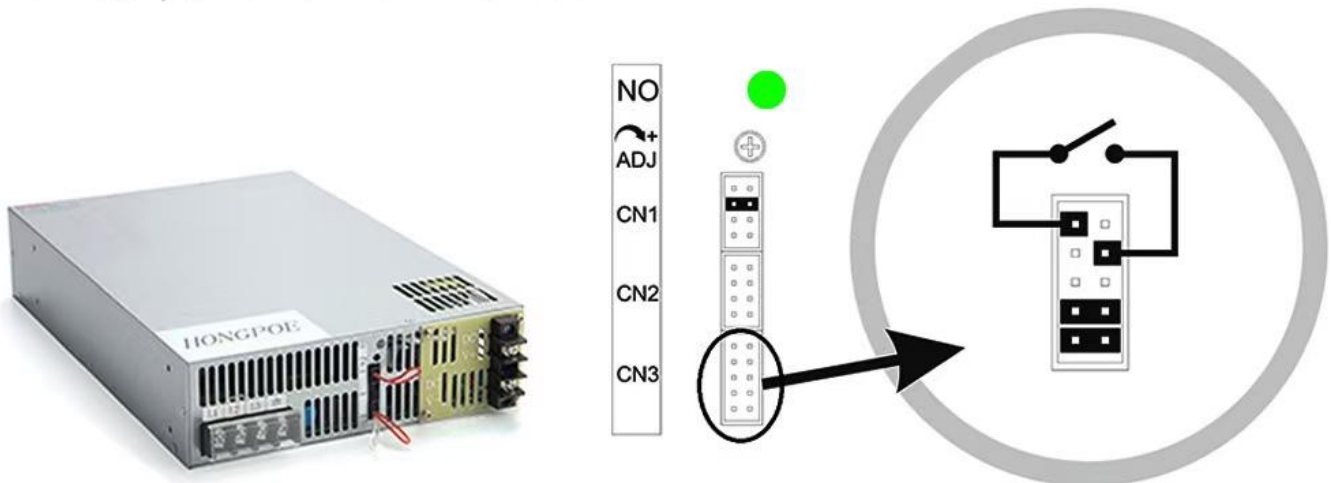


0-5V, 0-10V, PLC, PMW signal controls output voltage

0-100% and output current 0-105%

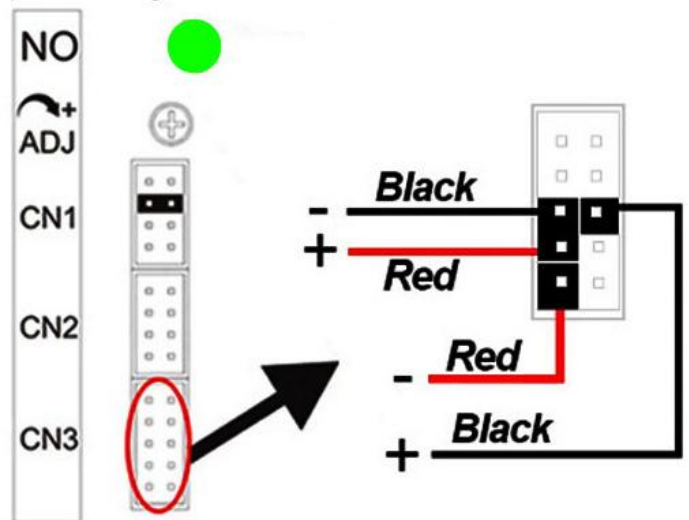

Variable resistor controls output voltage 0-100%

and output current 0-105%

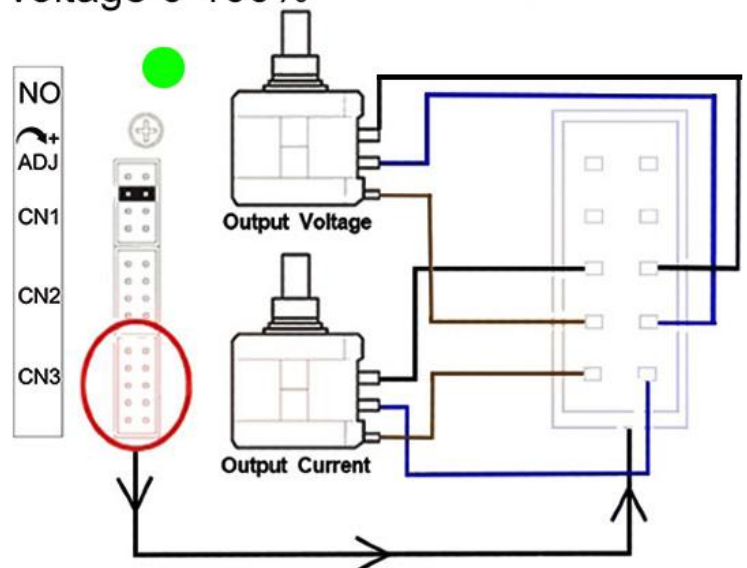

This series supports parallel wiring method for multiple power supplies with a maximum parallel total power of 50,000W.

