



R Series
Beauty Ring Light

LED Ring Light Stand Kit




Cool&Warm tones

Monochromatic

Colorful




A stunning show up with bright eyes

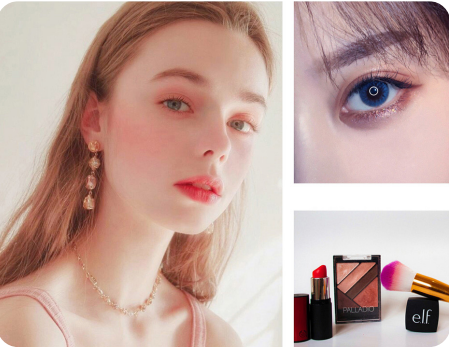

Soft light, rich color



A big difference after Light compensation

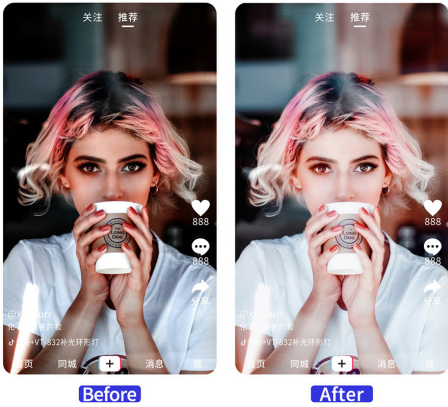

Applicable to all kinds of scenarios




Stepless adjustment



Make up



High definition



Backlight shooting



Low-light shooting

	Color Temperature	Luminance	Color Rendering Inde	LED Bulbs	Dimension	Inner Diameter	Outer Diameter	Input Voltage	Power	Weight	Battery Compartment	Mobile USB Connector	Betty Type	Color Type
Unit	K	Lm	Ra	pcs	inch	mm	mm	V	W	kg	/	/	/	/
R06	3200 ~ 6500	900	≥85	64	6	110	155	DC 5	9	0.11	/	/	/	/
R08	3200 ~ 6500	1100	≥85	72	8	147	208	DC 5	9	0.15	/	/	/	/
R11	3200 ~ 6500	1300	≥85	120	11	215	273	DC 5	11	0.28	/	/	/	/
R06A	3200 ~ 6500	900	≥85	96(RGB)	6	110	155	DC 5	9	0.11	/	/	/	7-colors RGB
R08A	3200 ~ 6500	1100	≥85	120(RGB)	8	147	208	DC 5	9	0.15	/	/	/	7-colors RGB
R11A	3200 ~ 6500	1300	≥85	180(RGB)	11	215	273	DC 5	11	0.28	/	/	/	7-colors RGB
R06F	3200 ~ 6500	900	≥85	64+24(RGB)	6	110	155	DC 5	9	0.11	/	/	/	15 fixed choice
R08F	3200 ~ 6500	1100	≥85	72+30(RGB)	8	147	208	DC 5	9	0.15	/	/	/	colors, 9 gradient
R11F	3200 ~ 6500	1300	≥85	120+48(RGB)	11	215	273	DC 5	11	0.28	/	/	/	colors to match.
R116	3200 ~ 6500	1690	≥80	320	16	305	405	AC 100 ~ 240	38	0.98	/	/	/	/
R119	3200 ~ 6500	1690	≥80	480	19	355	480	AC 100 ~ 240	48	1.18	/	/	/	/
R215	3200 ~ 6500	1598 ~ 1690	≥80	320	14	230	355	AC 100 ~ 240	35	1.16	Yes	Yes	18650	/
R216	3200 ~ 6500	1598 ~ 1690	≥80	320	16	305	405	AC 100 ~ 240	38	1.06	Yes	Yes	Li-ion	/
R219	3200 ~ 6500	1598 ~ 1690	≥80	480	19	360	488	AC 100 ~ 240	48	1.29	Yes	Yes	Battery	/
R219S	3200 ~ 6500	1598 ~ 1690	≥80	480	19	360	488	AC 100 ~ 240/ DC 17	48		Yes	Yes	18650 Li-ion	/
R316T	3200 ~ 6500	1598 ~ 1690	≥80	336	16	305	405	AC 100 ~ 240/ DC 17	26+18	0.85	Yes	Yes	Battery	RGB
LR-11	3000 ~ 6500	≈800	≥95	180	122×71×11.5 mm			AC 100 ~ 240	9	0.15	/	/	/	/
LR-21	3000 ~ 6500	≈800	≥95	180	144×74×11.5 mm			AC 100 ~ 240	9	0.195	/	/	/	/

VT Series
Live Stream Stands



FL Series
live stream stand




Quick switch between horizontal and vertical shootings



1

Flip locking system

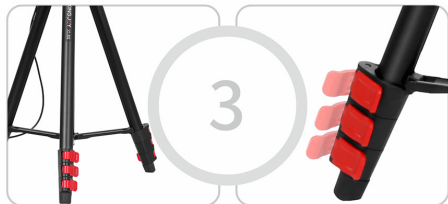

3

Adjustable center column design



2

Non-slip rubber foot pad



4

1 Center column locking system

Twist lock



Resistance lock



3 Center column tightening design



2 Multifunctional head



4 Non-slip locking system



	Section	Centre Column Type	Extended Height	General Height	Packing Length	Thick Tube Diameter	Locking System	Loading Capacity	Weight
Unit	/	/	mm	mm	mm	mm	/	kg	kg
VT-688	5	Double Concave Tube	1395	445	430	20	Flip	3	0.64
VT-820	3	/	1280	440	425	16.5	Flip	3	0.39
VT-831	4	/	1350	400	420	19.8	Flip	3	0.51
VT-831S	4	/	1315	418	418	19.8	Flip	3	0.8
VT-832	4	/	1315	405	420	19.6	Flip	3	0.53
VT-840	3	/	1400	490	500	20	Flip	5	0.92
VT-850	3	/	710	310	325	20	Flip	3	0.75
VT-860	4	/	1470	455	485	23	Flip	5	1.13
VT-860S	4	/	1750	505	530	23	Flip	5	1.19
VT-866	4	/	1520	500	530	23	Flip	5	1.42
VT-880	4	/	1480	455	480	23	Flip	5	1.25
VT-890	4	/	1780	520	545	27	Flip	5	1.6
VT-890H	4	/	1780	560	580	26.6	New Flip	5	1.63
VT-890H6	4	/	1810	590	610	26.6	New Flip	5	1.92
VT-990	5	/	1680	455	488	27	Flip	5	1.29
VTS-860	4	/	1425	433	440	23	New Flip	5	1.05
VTS-860L	4	/	1594	472	500	23	New Flip	5	1.16
VTS-890	4	/	1770	455	475	26.8	New Flip	5	1.2
VTS-890L	4	/	1883	480	500	26.8	New Flip	5	1.56
VTS-990	5	/	1624	433	455	27	New Flip	5	1.23
VTS-990L	5	/	1885	483	500	27	New Flip	5	1.33
FCS0192	5	Double Concave Tube	1690	460	433	25	New Flip	5	0.54
FL018	4	Double Concave Tube	1324	455	433	22	Flip	5	0.49
FL019	5	Double Concave Tube	1550	455	460	25	Flip	5	0.55
FL019S	5	Double Concave Tube	1562	461	433	25	Flip	5	0.57
FL019FS	5	Double Concave Tube	1725	535	450	25	Flip	4	0.51
FL029	5	Round Tube	1440	390	395	25	Eccentric	5	0.48
FL029S	5	Round Tube	1472	420	395	25	Eccentric	5	0.495
FL0591	5	Octagonal Tube	1433	450	430	25	Resistance	5	0.51
FL0591S	5	Octagonal Tube	1433	450	430	25	Resistance	5	0.51
FL1009	5	Round Tube	1810	550	465	25	Twist	6~8	1.06
FL1019	5	Double Concave Tube	1825	550	465	25	Twist	6~8	0.96
FL1118	4	Double Concave Tube	2010	925	490	25	Twist	8	0.74
FL118	4	Double Concave Tube	1325	455	433	22	Flip	5	0.415
FL119/FL119S	5	Double Concave Tube	1562	461	420	19	Flip	5	0.57
FL2009	5	Round Tube	1825	550	465	28	Flip	6~8	1.14
FL2018	4	Double Concave Tube	1810	560	460	28	Flip	6~8	0.98
FL2019	5	Double Concave Tube	1800	550	465	28	Twist	6~8	1.01
FS009	5	/	1290	460	428	25	/	3	0.47
MC1182	4	Double Concave Tube	1316	460	435	25	New Flip	8	0.42
MC1192	4	Double Concave Tube	1685	485	470	25	New Flip	8	0.46
MCS1182	4	Double Concave Tube	1350	457	435	25	New Flip	8	0.4
MCS1192	5	Double Concave Tube	1620	460	440	25	New Flip	8	0.45
ML018	4	Double Concave Tube	1322	454	450	25	New Flip	8	0.415
ML118	4	Double Concave Tube	1323	455	450	25	New Flip	8	0.415
TI01	4	Round Tube	1479	390	390	25	Twist	2	0.61
TI11	4	Round Tube	1290	440	380	25	Twist	3	0.49

Guangdong Kingjoy Technology Co.,Ltd.

Tel: 0760-8628 3558

E-mail: zhbff@126.com

Website: www.cnkingjoy.com

Address: No.5, Huanzhou Heng Lane, Tanzhou Town, Zhongshan City, Guangdong Province, China.



WeChat



Official Website