



# FCC TEST REPORT

For

Shenzhen Huopingguo Technology Co., LTD.

Electric bike

Model No. : C91, C93, C93 mini, C94, C99, C31, C34, D31

Prepared for : Shenzhen Huopingguo Technology Co., LTD.

Address : 6F building A 58# 2nd industrial Area Houting Shajin Bao'an,  
Shenzhen China

Prepared By : Guangdong Lintek Certification Group Co., Ltd.

Address : 302, Building B, Xunli Science and Technology Park, No.36 Zhangge  
Road, Fucheng Street, Longhua District, Shenzhen, Guangdong  
Province, China

Report Number : LTR23010510F01  
Receive Date : Jan. 05, 2023  
Date of Test : Jan. 05, 2023 to Feb. 03, 2023  
Date of Report : Feb. 03, 2023  
Version Number : REV0



## TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
<b>1. Summary of standards and results .....</b>	<b>4</b>
1.1. Description of Standards and Results .....	4
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. Description of Device (EUT).....	5
2.2. Block Diagram of connection between EUT and simulators.....	6
2.3. Test Facility.....	6
2.4. Measurement Uncertainty .....	6
2.5. Test mode Description .....	6
<b>3. POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>8</b>
3.1. Test Equipments .....	8
3.2. Block Diagram of Test Setup .....	8
3.3. Conducted Disturbance at Mains Terminals Test Standard and Limit.....	8
3.4. EUT Configuration on Test .....	8
3.5. Operating Condition of EUT .....	9
3.6. Test Procedure .....	9
3.7. Conducted Disturbance at Mains Terminals Test Results .....	9
<b>4. Radiated Disturbance test .....</b>	<b>12</b>
4.1. Test Equipments .....	12
4.2. Block Diagram of Test Setup .....	13
4.3. Radiated Emission Limit .....	14
4.4. EUT Configuration on Test .....	15
4.5. Operating Condition of EUT .....	15
4.6. Test Procedure .....	15
4.7. Test result .....	15
<b>5. Photo of the EUT .....</b>	<b>19</b>



### TEST REPORT DECLARATION

Applicant : Shenzhen Huopingguo Technology Co., LTD.

Manufacturer : Shenzhen Huopingguo Technology Co., LTD.

EUT Description : Electric bike

(A) Model No. : C91, C93, C93 mini, C94, C99, C31, C34, D31

(B) Trademark : N/A

(C) Ratings Supply : 54.6Vd.c. 2A (from adapter: input 100-240Vac 50/60Hz 3A)

(D) Test Voltage : 120Vac 60Hz

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart B Class B,  
ANSI C63.4-2014

The device described above is tested by Guangdong Lintek Certification Group Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Guangdong Lintek Certification Group Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part 15 Subpart B Class B requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Guangdong Lintek Certification Group Co., Ltd.

Tested by (name + signature).....:

Sunny Yuan  
Test Engineer

Approved by (name + signature).....:

Kevin Chen  
Project Manager

Date of issue.....:

Feb. 03, 2023





# 1. SUMMARY OF STANDARDS AND RESULTS

## 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

<b>EMISSION</b>			
<b>Description of Test Item</b>	<b>Standard</b>	<b>Limits</b>	<b>Results</b>
Power Line Conducted Emission Test	FCC Part 15 ANSI C63.4: 2014	Class B	PASS
Radiated Emission Test	FCC Part 15 ANSI C63.4: 2014	Class B	PASS

N/A is an abbreviation for Not Applicable.



## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Description : Electric bike

Classification : Class III

Model Number : C91, C93, C93 mini, C94, C99, C31, C34, D31

DIFF. : All models are the same except model name and color. The model C91 was selected to be tested

Trademark : N/A

Applicant : Shenzhen Huopingguo Technology Co., LTD.

Address : 6F building A 58# 2nd industrial Area Houting Shajin Bao'an, Shenzhen China

Manufacturer : Shenzhen Huopingguo Technology Co., LTD.

Address : 6F building A 58# 2nd industrial Area Houting Shajin Bao'an, Shenzhen China

Sample Type : Prototype production



## 2.2. Block Diagram of connection between EUT and simulators



**EUT: Electric bike**

## 2.3. Test Facility

### 2.3.1. Laboratory Name:

Guangdong Lintek Certification Group Co., Ltd.

### 2.3.2. Site Location :

302, Building B, Xunli Science and Technology Park, No.36 Zhangge Road, Fucheng Street, Longhua District, Shenzhen, Guangdong Province, China

## 2.4. Measurement Uncertainty

(95% confidence levels, k=2)

Test Item	Uncertainty	U <sub>cispr</sub>
Uncertainty for Conduction emission test	2.50dB	3.8 dB
Uncertainty for Radiation Emission test	3.04 dB (Distance: 3m Polarize: V)	5.2 dB
	3.02 dB (Distance: 3m Polarize: H)	
Uncertainty for Power Clamp Test	3.94 dB	4.5 dB
Uncertainty for Flicker test	0.05%	N/A
Uncertainty for Harmonic test	1.8%	N/A

## 2.5. Test mode Description

No.	Test Mode
-----	-----------



1.	Normal working
Note:	




### 3. POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	100873	May 06, 22	1 Year
2.	L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	May 06, 22	1 Year
3.	RF Cable	Schwarzbeck	Cable 2	2M	May 06, 22	1 Year
4.	Coaxial Switch	Schwarzbeck	CX-210	N/A	May 06, 22	1 Year
5.	Pulse Limiter	Schwarzbeck	9516F	9618	May 06, 22	1 Year

#### 3.2. Block Diagram of Test Setup

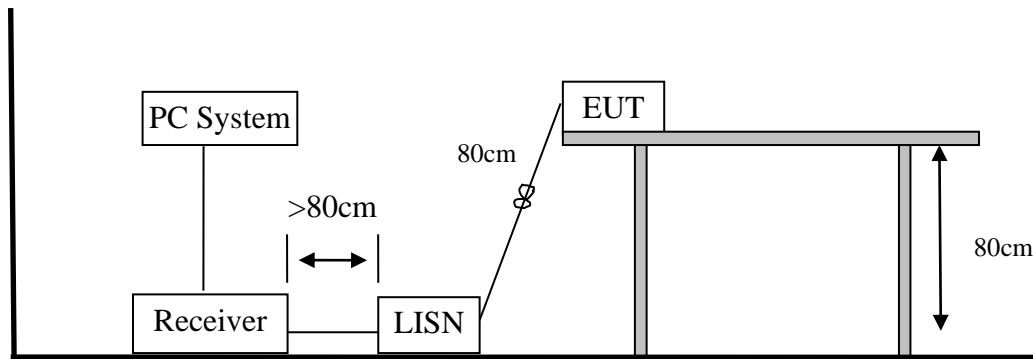

#### 3.3. Conducted Disturbance at Mains Terminals Test Standard and Limit

Frequency	At mains terminals (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 *	56 ~ 46 *
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes: 1. Emission level=Read level+LISN factor-Preamp factor+Cable loss  
 2\* Decreasing linearly with logarithm of frequency.  
 3. The lower limit shall apply at the transition frequencies.

#### 3.4. EUT Configuration on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to



maximize its emission characteristics in a normal application.

### 3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in section 3.2.

3.5.2. Turned on the power of all equipments.

3.5.3. Let the EUT worked in test mode 15 minutes after taking the test.

### 3.6. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). The power line was checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4 on Conducted Disturbance at Mains Terminals test.

The bandwidth of test receiver (R & S ESCI) is set at 10kHz.


The frequency range from 150kHz to 30MHz is checked. The test result are reported on Section 3.7.

### 3.7. Conducted Disturbance at Mains Terminals Test Results

Pass




L

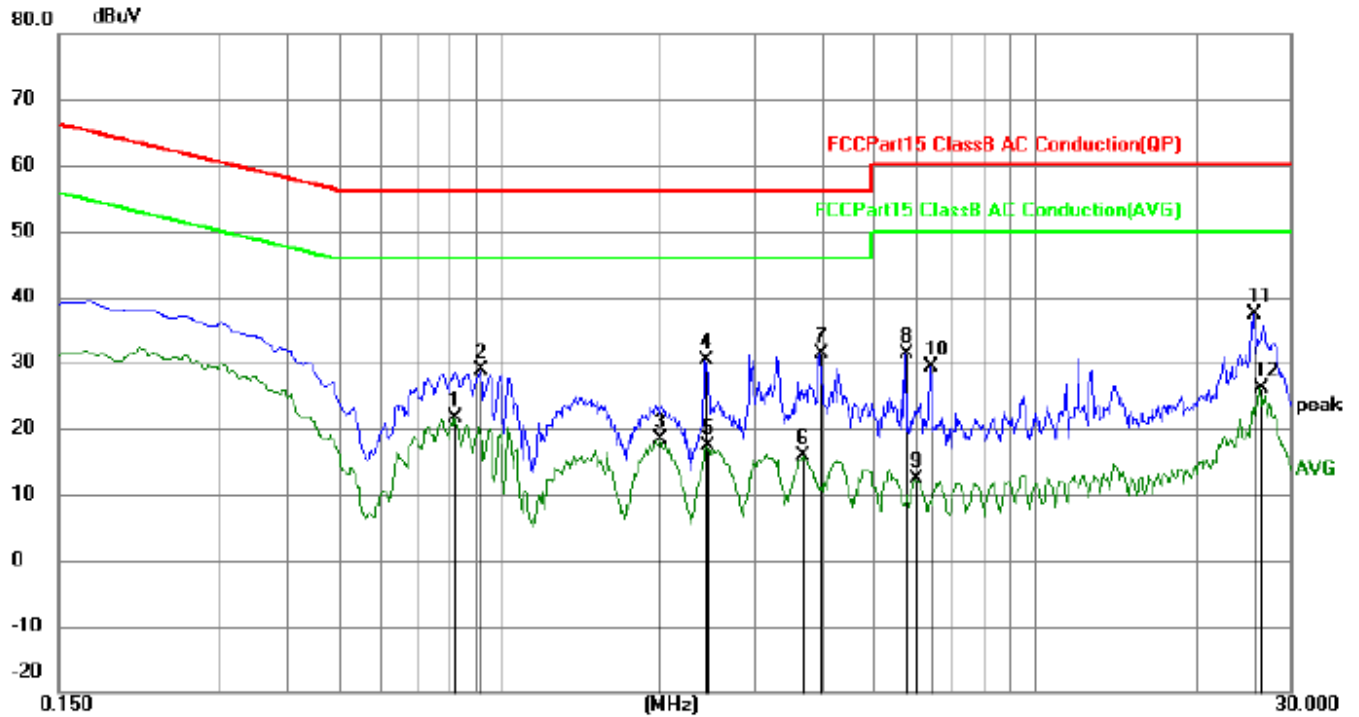

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.8249	11.34	10.31	21.65	46.00	-24.35	AVG	P	
2	0.9195	18.52	10.30	28.82	56.00	-27.18	peak	P	
3	1.9949	8.10	10.30	18.40	46.00	-27.60	AVG	P	
4	2.4224	20.13	10.31	30.44	56.00	-25.56	peak	P	
5	2.4404	7.18	10.31	17.49	46.00	-28.51	AVG	P	
6	3.6915	5.51	10.32	15.83	46.00	-30.17	AVG	P	
7	3.9750	21.10	10.33	31.43	56.00	-24.57	peak	P	
8	5.7300	21.02	10.35	31.37	60.00	-28.63	peak	P	
9	5.9640	1.98	10.35	12.33	50.00	-37.67	AVG	P	
10	6.3645	18.93	10.36	29.29	60.00	-30.71	peak	P	
11	25.6740	26.75	10.63	37.38	60.00	-22.62	peak	P	
12	26.2905	15.45	10.63	26.08	50.00	-23.92	AVG	P	



N

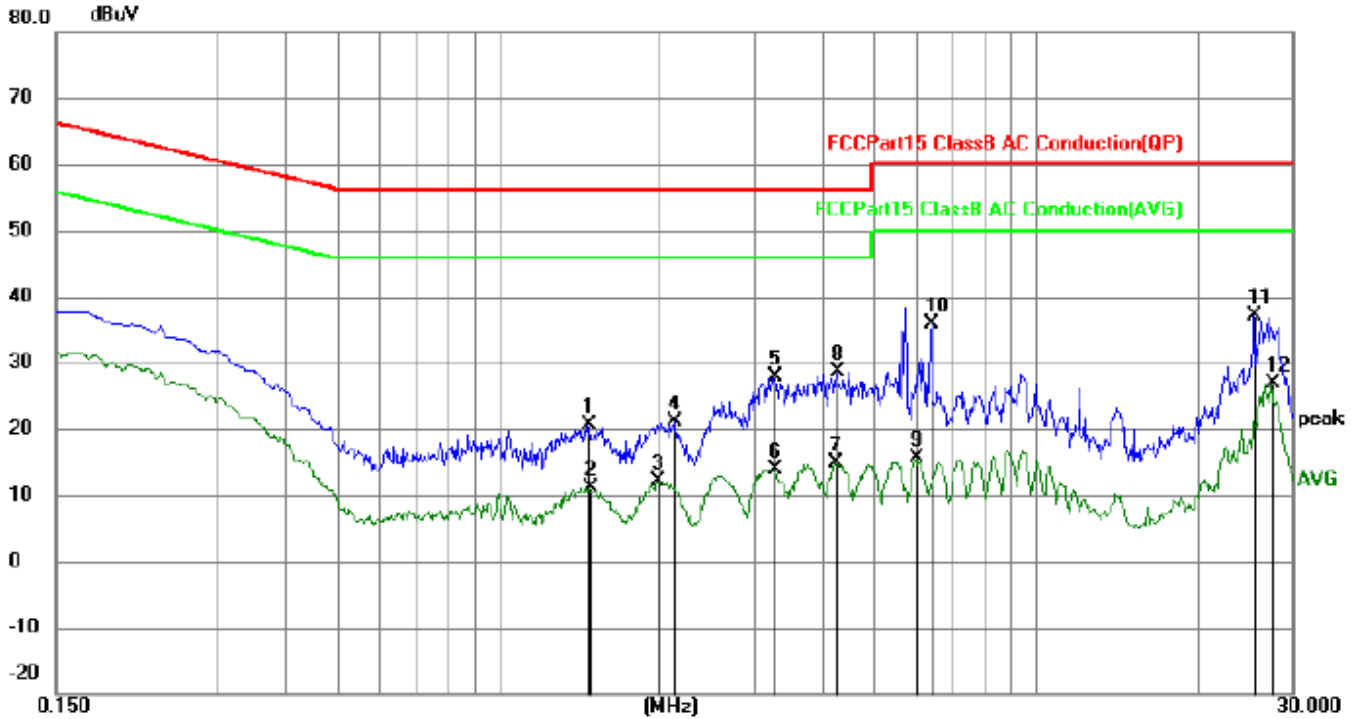

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	1.4685	10.43	10.30	20.73	56.00	-35.27	peak	P	
2	1.4730	0.91	10.30	11.21	46.00	-34.79	AVG	P	
3	1.9770	1.86	10.30	12.16	46.00	-33.84	AVG	P	
4	2.1300	10.71	10.30	21.01	56.00	-34.99	peak	P	
5	3.2595	17.64	10.32	27.96	56.00	-28.04	peak	P	
6	3.2595	3.49	10.32	13.81	46.00	-32.19	AVG	P	
7	4.2404	4.47	10.33	14.80	46.00	-31.20	AVG	P	
8	4.2810	18.41	10.33	28.74	56.00	-27.26	peak	P	
9	6.0180	5.37	10.35	15.72	50.00	-34.28	AVG	P	
10	6.4005	25.54	10.36	35.90	60.00	-24.10	peak	P	
11	25.5615	26.61	10.63	37.24	60.00	-22.76	peak	P	
12	27.4650	16.24	10.65	26.89	50.00	-23.11	AVG	P	



## 4. RADIATED EMISSION TEST


### 4.1. Test Equipments

#### 4.1.1. For frequency range 30MHz~1000MHz (At Semi Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	Rohde&Schwarz	ESCI	101165	May 06, 22	1 Year
2	Amplifier	Quietek	AP/0100A	0506005	May 06, 22	1 Year
3	Coaxial Switch	ANRITSUCORP	MP5913	6200615651	N/A	N/A
4	Bilog Antenna	Schwarzbeck	VULB 9168	9168-438	May 06, 22	1 Year
5	Spectrum Analyzer	Agilent	E4407B	MY49510055	May 06, 22	1 Year
6	Horn Antenna	Schwarzbeck	BBHA 9120 D	BBHA 9120 D(1201)	May 06, 22	1 Year
7	Amplifier	Quietek	AP-180C	CHM-0602012	May 06, 22	1 Year

## 4.2. Block Diagram of Test Setup

### 4.2.1. In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

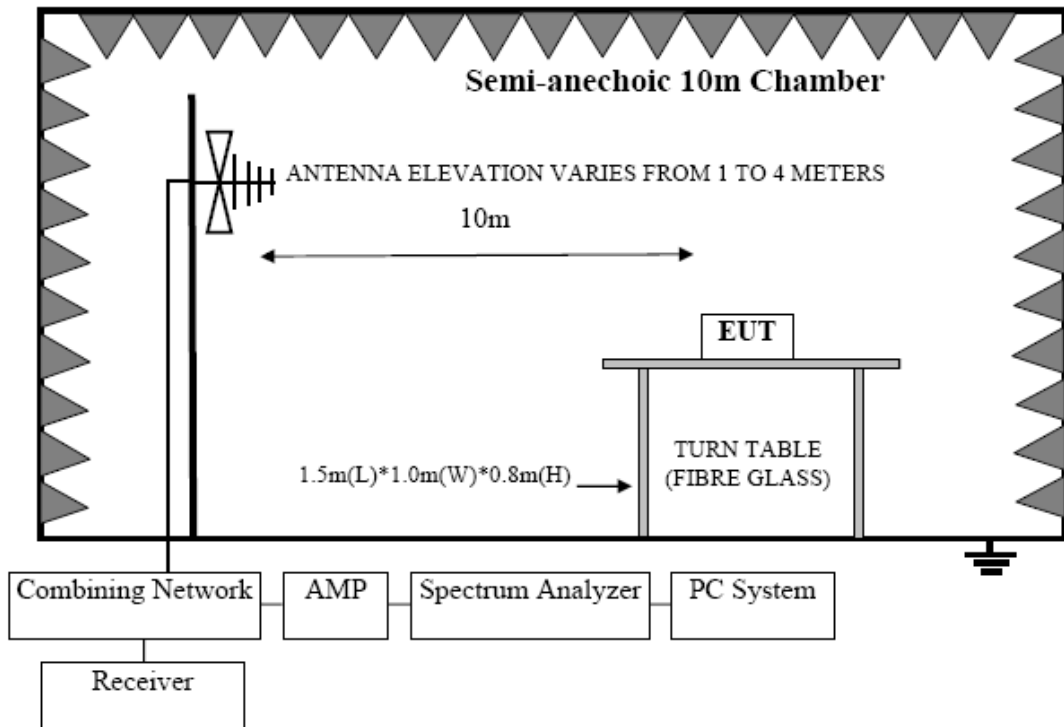

4.2.2. In Semi Anechoic Chamber (3m) Test Setup Diagram for 1000MHz~6000MHz

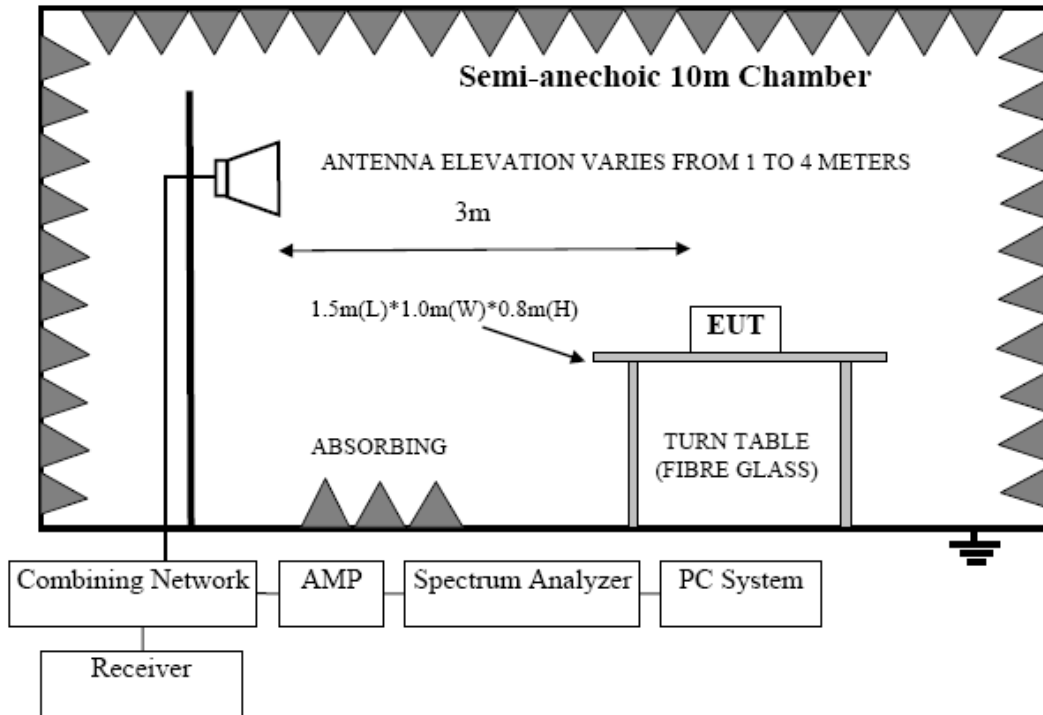

4.3. Radiated Emission Limit

All emanations from a devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Frequency MHz	Distance (Meters)	Field Strengths Limits dB(μV)/m
30 ~ 88	3	40.0
88 ~ 216	3	43.5
216 ~ 960	3	46.0
960 ~ 1000	3	54.0
1000 ~ 6000	3	74(Peak) 54(Average)

- Remark: (1) Emission level = Read level+Antenna Factor-Preamp Factor +Cable Loss  
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



#### 4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

4.4.1. Support Equipments : As Tested Supporting System Detail, in Section 2.2.

#### 4.5. Operating Condition of EUT

4.5.1. Setup the EUT and simulator as shown as Section 5.2.

4.5.2. Turned on the power of all equipment.

4.5.3. Let the EUT work in test mode 15 minutes after taking the test.

#### 4.6. Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all the interface cables were changed according to EN ANSI C63.4 on Radiated Emission test.

The bandwidth setting on the test receiver (Rohde&Schwarz Test Receiver ESCI) is 120 kHz.

#### 4.7. Test result

**PASS.**

The EUT with the following test mode was tested and read QP values, the test results are listed in next pages.

Temperature: 24.2°C      Humidity: 54%

The details of test mode is as follows :

No.	Test Mode
1	Normal working




The Worst model

**For frequency range 1GHz~6GHz**

The highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. So the frequency rang 1GHz-6GHz radiation test not applicable.




Horizontal

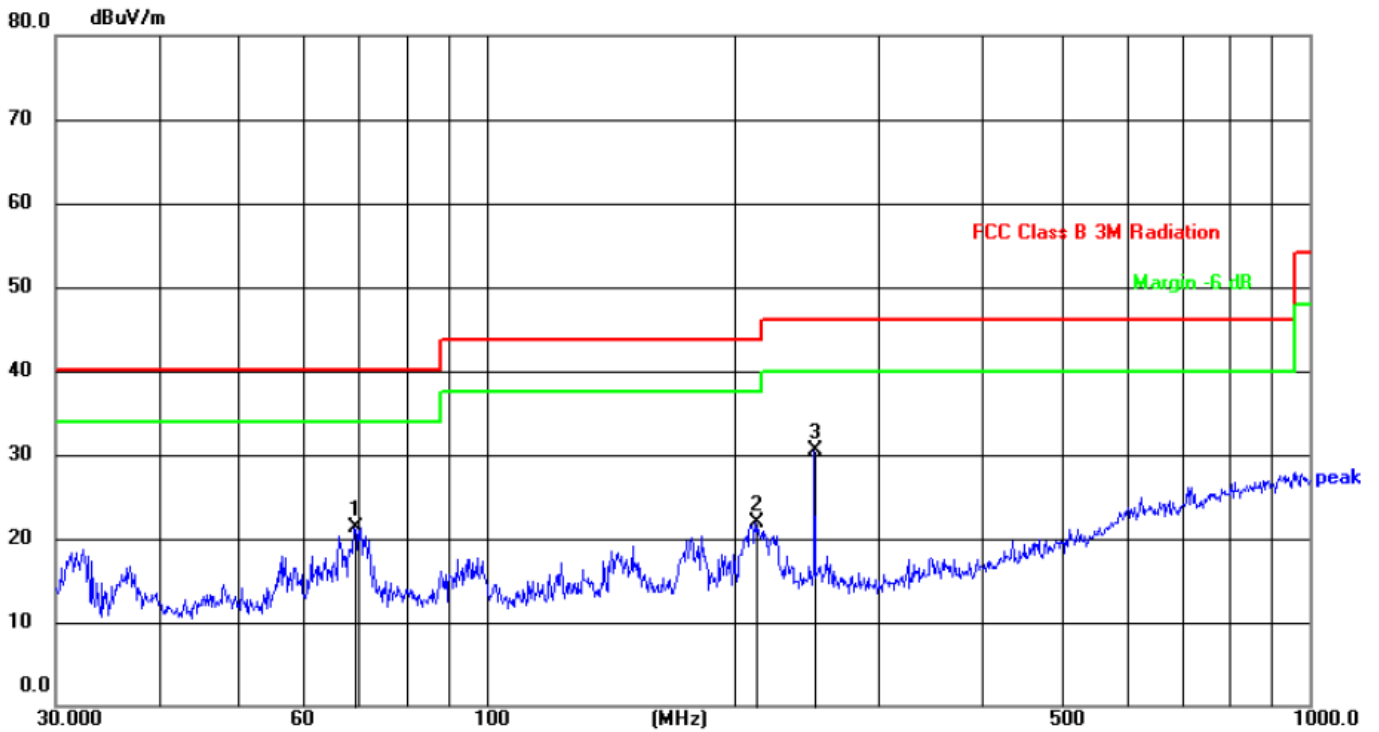

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	69.1141	41.90	-20.63	21.27	40.00	-18.73	peak				
2	212.2695	40.31	-18.50	21.81	43.50	-21.69	peak				
3	250.3012	48.76	-18.20	30.56	46.00	-15.44	peak				



Vertical

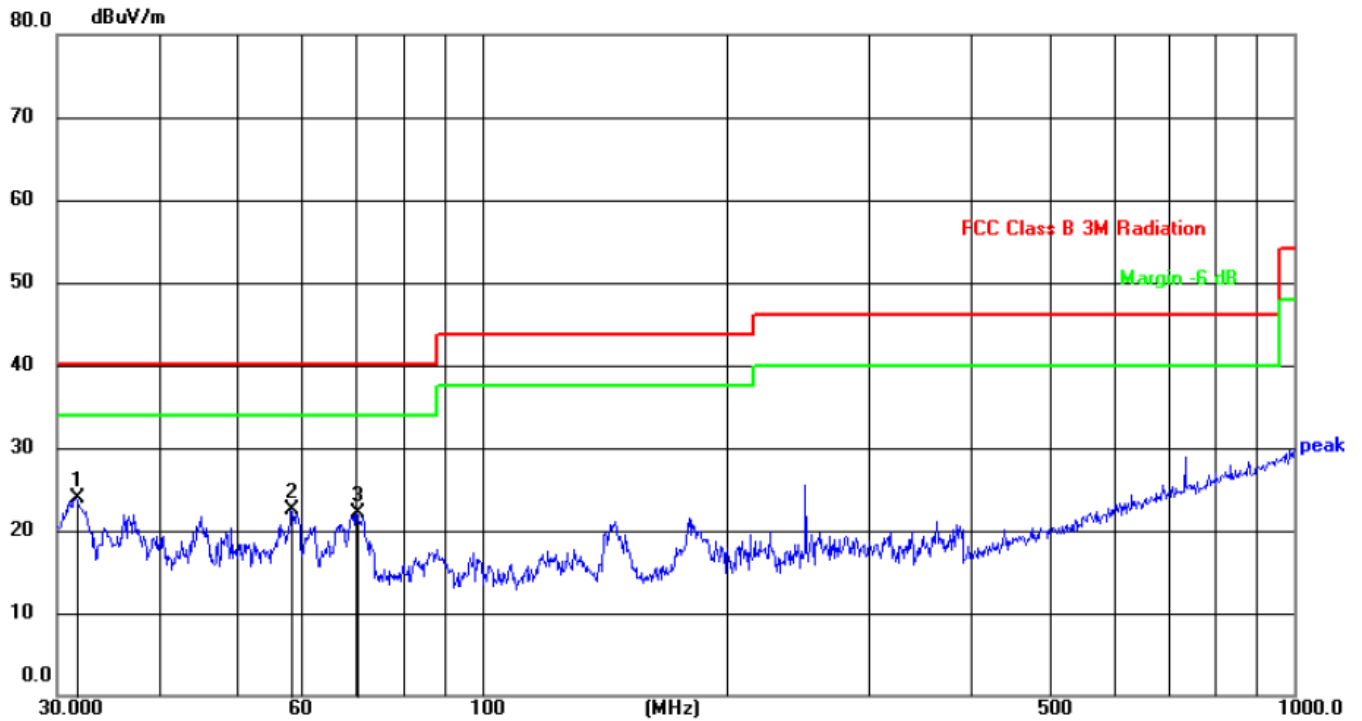

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	31.6202	45.30	-21.45	23.85	40.00	-16.15	peak				
2	58.2030	43.28	-20.77	22.51	40.00	-17.49	peak				
3	70.0903	42.70	-20.55	22.15	40.00	-17.85	peak				

## 5. PHOTO OF THE EUT



Fig. 1



Fig. 2

-----THE END OF REPORT-----